

OMNISEAL™ SYSTEM



OmniSeal™ is a multi-ply self-adhered system for low slope roofs.

Designed for 2:12 and lower roof slopes, with colors matched to Malarkey's shingle offerings, OmniSeal™ is the perfect solution for the low slope portion of your home or commercial building.

- ▶ Easy to install
- ▶ Polymer modified [rubberized] asphalt
- ▶ 500% thicker than traditional single-ply roofs
- ▶ Enhanced granule adhesion
- ▶ Aggressive roll adhesives
- ▶ Cap sheets feature an adhesive selvage edge for lap joint seams

	410 OMNISEAL™ BASE <i>Factory-applied primer on top enhances adhesion</i>	420 OMNISEAL™ PLY <i>Factory-applied primer on top enhances adhesion</i>	430 OMNISEAL™ CAP <i>Available in multiple colors to match Malarkey shingles</i>	436 OMNISEAL™ CAP FR <i>Available in multiple colors to match Malarkey shingles</i>
Application Method	Mechanically Fastened	Self-Adhered	Self-Adhered	Self-Adhered
Asphalt Technology	Polymer Modified Asphalt	Polymer Modified Asphalt	Polymer Modified Asphalt	Polymer Modified Asphalt
Tear Strength	Enhanced	Enhanced	Enhanced	Enhanced
Thickness	55 mils [1.4 mm]	70 mils [1.8 mm]	115 mils [2.9 mm]	125 mils [3.2 mm]
Weight	80 lbs [36.3 kg] per roll	80 lbs [36.3 kg] per roll	78 lbs [35.4 kg] per roll	88 lbs [40 kg] per roll
Size	39% [®] x 66', Net 2 sq. [1 m wide x 20.1 m long]	39% [®] x 66', Net 2 sq. [1 m wide x 20.1 m long]	39% [®] x 34', Net 1 sq. [1 m wide x 10.4 m long]	39% [®] x 34', Net 1 sq. [1 m wide x 10.4 m long]
Testing Compliance	ASTM D4601 Type II; UL & Intertek Listed	ASTM D1970, ASTM D4601, ASTM D6163 Type I, FM Approved, UL & Intertek Listed	ASTM D3909; ASTM D7530; UL 2218 Class 4; Intertek Listed	ASTM D3909; ASTM D7530, ASTM D1970; ASTM D6163 Type I, Grade G; UL 2218 Class 4; Intertek Listed
Warranties+	Up to 20 years	Up to 20 years	Up to 20 years	Up to 20 years
Fire Resistance [FR]	ASTM E108 Class A, B, & C	ASTM E108 Class A, B, & C	ASTM E108 Class B & C	ASTM E108 Class A & B

* Malarkey Roofing Products® offers various warranties to meet specific requirements. Visit www.malarkeyroofing.com/warranties for more information.
Rev. 07/22




Multiple System Options


Combustible OR
Non-Combustible Decks

Complement any low slope project with OmniSeal™ Cap or Cap FR available in a variety of beautiful colors.

Two-Ply System of 410 or 420 and 430 or 436.

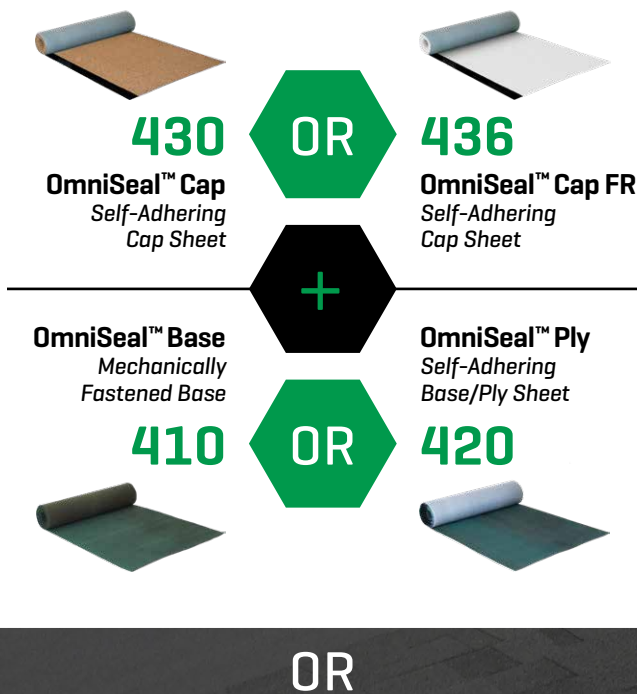

The Complete Three-Ply System of 410, 420, and 430 or 436.

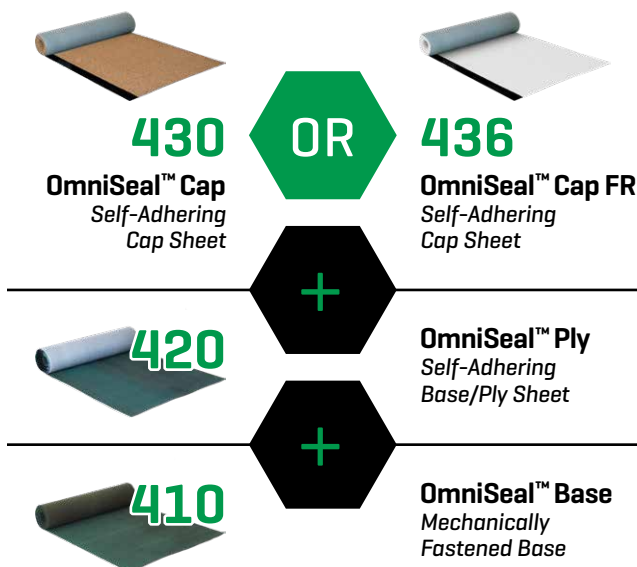

OmniSeal™ Roofing Systems using either cap sheet meet UL 2218 Class 4 impact resistant standards.



P.O. Box 17217
Portland, Oregon 97217
800.545.1191
www.malarkeyroofing.com

